

# Middlesex University Research Repository

An open access repository of

Middlesex University research

<http://eprints.mdx.ac.uk>

Kalyani, Ganesh Kumar, Gandhi, Vaibhav ORCID logoORCID:  
<https://orcid.org/0000-0003-1121-7419>, Yang, Zhijun ORCID logoORCID:  
<https://orcid.org/0000-0003-2615-4297> and Geng, Tao ORCID logoORCID:  
<https://orcid.org/0000-0002-6863-243X> (2016) ROS based autonomous control of a humanoid robot. Artificial Neural Networks and Machine Learning – ICANN 2016. In: 25th International Conference on Artificial Neural Networks (ICANN), 06-09 Sept 2016, Barcelona, Spain. ISBN 9783319447780. ISSN 0302-9743 [Conference or Workshop Item] (doi:10.1007/978-3-319-44778-0)

Final accepted version (with author's formatting)

This version is available at: <https://eprints.mdx.ac.uk/23630/>

## Copyright:

Middlesex University Research Repository makes the University's research available electronically.

Copyright and moral rights to this work are retained by the author and/or other copyright owners unless otherwise stated. The work is supplied on the understanding that any use for commercial gain is strictly forbidden. A copy may be downloaded for personal, non-commercial, research or study without prior permission and without charge.

Works, including theses and research projects, may not be reproduced in any format or medium, or extensive quotations taken from them, or their content changed in any way, without first obtaining permission in writing from the copyright holder(s). They may not be sold or exploited commercially in any format or medium without the prior written permission of the copyright holder(s).

Full bibliographic details must be given when referring to, or quoting from full items including the author's name, the title of the work, publication details where relevant (place, publisher, date), pagination, and for theses or dissertations the awarding institution, the degree type awarded, and the date of the award.

If you believe that any material held in the repository infringes copyright law, please contact the Repository Team at Middlesex University via the following email address:

[eprints@mdx.ac.uk](mailto:eprints@mdx.ac.uk)

The item will be removed from the repository while any claim is being investigated.

See also repository copyright: re-use policy: <http://eprints.mdx.ac.uk/policies.html#copy>

## ROS based Autonomous control of a Humanoid Robot

Ganesh Kumar Kalyani<sup>1</sup>, Zhijun Yang<sup>1</sup>, Vaibhav Gandhi<sup>1</sup>, and Tao Geng<sup>1</sup>

<sup>1</sup>Middlesex University, London, UK

Gk434@live.md.ac.uk, [Z.Yang, V.Gandhi, T.Geng] @mdx.ac.uk

**Abstract.** This paper demonstrates how to control a Bioloid humanoid robot using a BeagleBone Black (BBB) and Robot Operating System (ROS). ROS works as a development framework in synchrony with the BBB and integrates the robotic functions as a whole. Individual AX-12A Dynamixel servo motors and sensors are used to control the robot movement, so that it walks with reasonable balance and gait (cf. Figure 1 and a demonstration video in [1]).

The two-legged robot is constructed using 12 servos, resulting in 12 degree of freedom (DOF). USB2Dynamixel connector is used to operate the Dynamixel actuators through the Wi-Fi interface of the BBB [2]. Position of the Dynamixel AX-12A servos is obtained using inbuilt encoders. A Gyro sensor is mounted around the centre of the robot, which supports in balancing the robot. One infrared (IR) sensor mounted on the robot's chest is used to detect obstacles. Additional libraries are added from ROS, thereby enabling the BBB to work with a Wi-Fi adaptor and a USB camera. When the robot is moving forward, if the IR sensors detect presence of an obstacle, then further movement of the robot is stopped. Additionally, an alarm is raised by flickering of the LEDs mounted on the BBB. The gyro sensor also sends data to the BBB, and these sensor parameters are updated once in every 500 milliseconds. This dynamic model is used as a building block to actuate the motors mounted on the leg, thereby resulting in a swing-stance period of the legs for further movement [3].

This study has the potential to enhance the capability of the Bioloid humanoid robot. The inbuilt RoboPlus software of the Robotis Bioloid robot is meant for easy programming, but it has limited universal applicability. Therefore, in the work presented here, this software has been replaced by ROS, along with a python script for a universal acceptability towards autonomous control of the Bioloid humanoid robot.

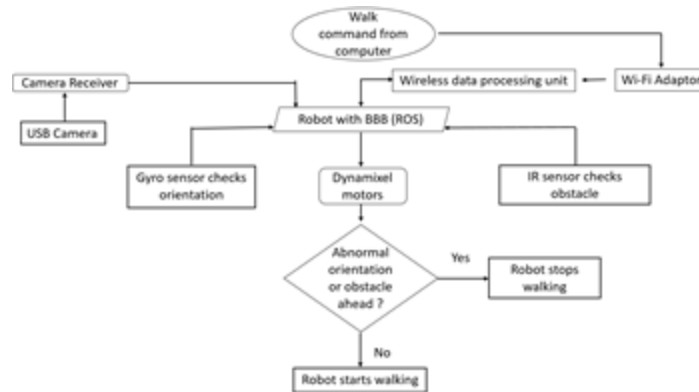


Figure 1: Functional components of the robot

1. <https://www.youtube.com/watch?v=9N0LkQyJW7U&feature=youtu.be>
2. *ROBOTIS e-Manual v1.25.00*, v1.27.00, ROBOTIS 12-06-2015
3. Z.Yang *Dynamic control of walking leg joints: A building block model perspective*, ICNC 2011: 459-463